

Mark 68HP

High Pressure Regulating Valves

DESCRIPTION

The Mark 68HP is designed primarily for high pressure steam service as commonly found in power plants, refineries, pulp & paper mills, and other high pressure process applications. Since high pressure superheated steam is routinely used for power generation (turbines), a pressure regulator capable of withstanding these pressures is needed for the distribution of lower pressure steam for individual process requirements. Common uses for the Mark 68HP include:

- Pressure reduction of turbine extraction steam to desuperheaters.
- Steam injection to turbine bearing seals to eliminate pressure differential across this area.
- Primary pressure reduction from the main steam header to lower pressure points of use.

OPERATION

The downward force of the spring holds the plug normally open. As the downstream pressure increases due to a decrease in flow demand, the diaphragm rises to close the valve. The controlled downstream pressure set point can be increased by rotating the adjusting screw clockwise or decreased by turning the adjusting screw counter-clockwise. A combination of springs is available so that all control settings can be accommodated with minimal droop.

FEATURES

- In-line maintainable — provides easy access to the seat for reduced downtime. Ideal for services where the valve is welded in line.
- Self-aligning plug — guided upper diaphragm plate, lower diaphragm plate, and stem ensures that the plug stays centered in the seat.
- Stellite seat insert, 17-4 plug — for long service life under high pressure conditions.
- Continuous unperforated diaphragm — stands up to the rigorous demands of high pressure services for long diaphragm life.



SPECIFICATIONS

Sizes: 1/2" (DN15); 3/4" (DN20); 1" (DN25)

End Connections

- Threaded — NPT, FSW
- Flanged

Materials

- Body: WCB Carbon Steel or CF8M Stainless Steel
- Seat: Stellite
- Trim: Stainless Steel
- Spring Housing: Steel
- Diaphragm: Hastelloy C
- Gaskets: Grafoil

Service: steam, gas and non-cavitating liquid (for gas and liquid service, we recommend the Jordan Mark 6800HP for higher pressure capabilities)

Shutoff: ANSI Class III

Body Pressure Rating

- WCB: 900 psig @ -20°F to +650°F (62 bar @ -29°C to +343°C)
- CF8M: 900 psig @ -20°F to +100°F; 640 psig @ 650°F (62 bar @ -29°C to 38°C, 44 bar @ 343°C)

Maximum Pressure Drop: 800 psig (55 bar)

Cv (Kv) Rating

- 1/2" (DN15): 2.3 or 1.4 (2,0 or 1,2)
- 3/4" & 1" (DN20 & DN25): 5.0, 2.3 or 1.8 (4,3, 2,0 or 1,6)



Jordan Valve, a Division of Richards Industries


3170 Wasson Road • Cincinnati, Ohio 45209

Telephone 513-533-5600 • Fax 513-871-0105

Toll-Free Telephone: 800-543-7311 (U. S. A. & Canada)

E-Mail: info@richardsind.com • URL: www.jordanvalve.com

DIMENSIONS

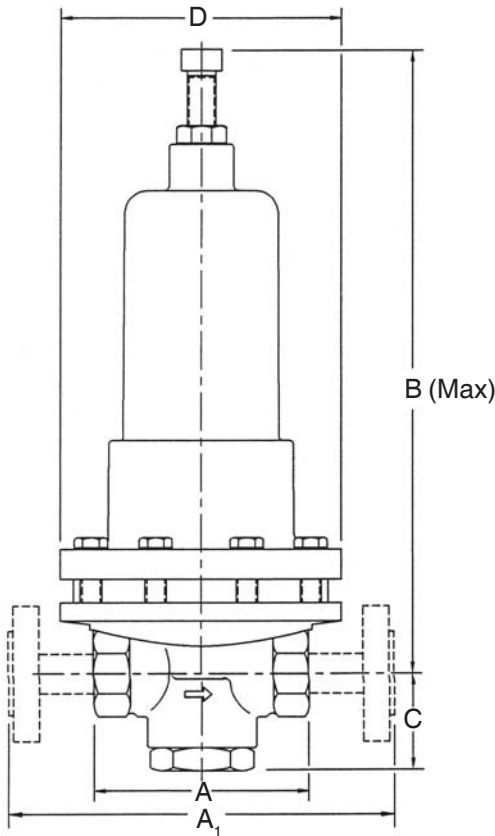

■ Threaded Ends

Size	Dimensions (Inches)				Weight (lbs.)
	A	B	C	D	
1/2"	4.87"	11.50"	2.56"	5.00"	11#
3/4" & 1"	6.81"	14.50"	2.62"	6.81"	20#

■ Threaded Ends, DIN

Size (DN)	Dimensions (mm)				Weight (kg)
	A	B	C	D	
15	124	292	65	127	5,0
20 & 25	173	368	67	173	9,1

■ Flanged Ends

Size	ANSI Flange	Dimensions (Inches)				Weight (lbs.)
		A	B	C	D	
1/2"	150#	9.50"	11.50"	2.56"	5.00"	13#
	300#	9.75"	11.50"	2.56"	5.00"	16#
3/4" & 1"	150#	11.31"	14.50"	2.62"	6.81"	24#
	300#	11.56"	14.50"	2.62"	6.81"	27#

■ Flanged Ends, DIN

Size (DN)	Flange (PN)	Dimensions (mm)				Weight (kg)
		A	B	C	D	
15	10/16	241	292	65	127	5,9
	25/40	248	292	65	127	7,3
20 & 25	10/16	287	368	67	173	10,9
	25/40	294	368	67	173	12,2

ORDERING SCHEMATIC

1	-	2	-	3	/	4	5	6	7
----------	---	----------	---	----------	---	----------	----------	----------	----------

1	Model	
68HP	High Pressure	

2	Size	
050	1/2" (DN15)	
075	3/4" (DN20)	
100	1" (DN25)	

3	Body Material	
CS	Carbon Steel (WCB)	
SS	Stainless Steel (CF8M)	

4	End Connections	
PT	NPT	
SW	FSW	
F5	150# FE	
F3	300# FE	
ZZ	Non-standard	

5	Trim	
C1	Cv 1.4	
C2	Cv 1.8	
C3	Cv 2.3	
C4	Cv 5.0	
ZZ	Non-standard	

6	Range PSI (BAR)	
R1	100 - 300 (6,9 - 20,7)	
R2	200 - 450 (13,8 - 31,0)	
R3	100 - 350 (6,9 - 24,1)	
R4	300 - 600 (20,7 - 41,4)	
ZZ	Non-standard	

7	Actuator	
A1	Actuator	
ZZ	Non-standard	