


+


THREADED & FSW ENDS						
VALVE SIZE	MAT'L	DIMENSIONS, INCHES				Wt. lbs. ③
		A	B ①	C	D ②	
1/2" & 3/4"	DI/BRZ	3.62	9.38	2.18	9.5	24
	CS/SS	3.65	9.38	2.18	9.5	24
1"	DI/BRZ	4.12	9.62	2.62	9.5	26
	CS/SS	4.12	9.62	2.62	9.5	28
1 1/4"	DI/BRZ	4.12	9.87	2.62	9.5	26
	DI/BRZ	4.50	9.87	2.62	9.5	27
1 1/2"	CS/SS	4.65	9.87	2.75	9.5	28
2"	DI/BRZ	4.50	10.00	2.62	9.5	29
	CS/SS	5.50	10.00	3.00	9.5	32

FLANGED END						
VALVE SIZE	ANSI FLANGE	DIMENSIONS, INCHES				Wt. lbs. ③
		A <sub>1</sub>	B ①	C	D ②	
1/2"	150#	7.25	9.38	2.18	9.5	26
	300#	7.50	9.38	2.18	9.5	28
3/4"	150#	7.25	9.38	2.18	9.5	26
	300#	7.62	9.38	2.18	9.5	28
1"	150#	7.25	9.62	2.62	9.5	30
	300#	7.75	9.62	2.62	9.5	32
1 1/4"	150#	7.87	9.87	2.62	9.5	28
	300#	8.37	9.87	2.62	9.5	30
1 1/2"	150#	8.75	9.87	2.75	9.5	30
	300#	9.25	9.87	2.75	9.5	32
2"	150#	10.00	10.00	3.00	9.5	34
	300#	10.50	10.00	3.00	9.5	36

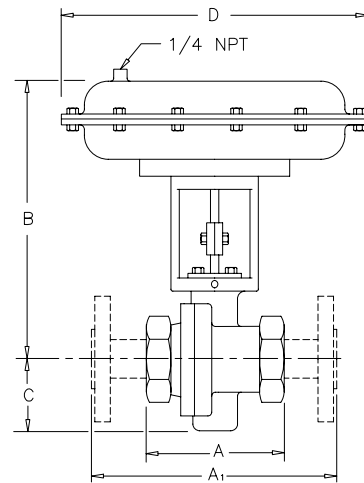

- ① B DIMENSIONS ARE FOR 35M ACTUATOR; FOR 55M ACTUATOR ADD 1.2", FOR 85M ACTUATOR ADD 2".
- ② D DIMENSIONS ARE FOR 35M ACTUATOR; FOR 55M ACTUATOR ADD 3", FOR 85M ACTUATOR ADD 5.5".
- ③ WEIGHTS ARE FOR 35M ACTUATOR; FOR 55M ACTUATOR ADD 11#, FOR 85M ACTUATOR ADD 20#.

SPECIFICATION DATA	
CUSTOMER	_____
ORDER No.	_____ SERIAL No. _____
TAG No.	_____
VALVE TYPE	_____ QTY. _____
BODY	_____
END CONN.	_____
INLET PRESS.	_____ MAX. Δ P _____
CONTROL RANGE	_____
VALVE ACTION: RISE IN SIGNAL TO	<input type="checkbox"/> OPEN
	<input type="checkbox"/> CLOSE
VALVE SEAT	_____ Cv _____
MISC.	_____
CERTIFIED	_____ DATE _____

 RICHARDS INDUSTRIES  
CINCINNATI, OHIO  
U.S.A.  
VALVE GROUP

FN: MK70

1/2-2" MARK 70  
DIAPHRAGM CONTROL VALVE

DRAWN BY	DATE
JLA	6/26/98
CHECKED BY	DATE

MK70

+