


+

THREADED & FSW ENDS						FLANGED END							
VALVE SIZE	MAT'L	DIMENSIONS, INCHES				Wt. lbs.	VALVE SIZE	ANSI FLANGE	DIMENSIONS, INCHES				Wt. lbs.
		A	B	C	D				A1	B	C	D	
1/2" & 3/4"	DI/BRZ	3.62	12.00	2.18	7.00	20	150#	7.25	12.00	2.18	7.00	21	23
	CS/SS	3.65	12.00	2.18	7.00	21	300#	7.50	12.00	2.18	7.00	22	24
1"	DI/BRZ	4.12	12.25	2.62	7.00	22	150#	7.25	12.00	2.18	7.00	22	25
	CS/SS	4.12	12.25	2.62	7.00	23	300#	7.62	12.00	2.18	7.00	23	28
1 1/4"	DI/BRZ	4.12	12.25	2.62	7.00	22	150#	7.25	12.25	2.62	7.00	24	28
1 1/2"	DI/BRZ	4.50	12.75	2.75	7.00	24	300#	7.75	12.25	2.62	7.00	25	30
	CS/SS	4.65	12.75	2.75	7.00	25	150#	7.87	12.25	2.62	7.00	25	
2"	DI/BRZ	4.50	12.81	3.00	7.00	24	1 1/4"	8.37	12.25	2.62	7.00	26	
	CS/SS	5.50	12.81	3.00	7.00	27	150#	8.75	12.75	2.75	7.00	27	32
							1 1/2"	9.25	12.75	2.75	7.00	30	38
							2"	10.00	12.81	3.00	7.00	29	38
								10.50	12.81	3.00	7.00	31	42

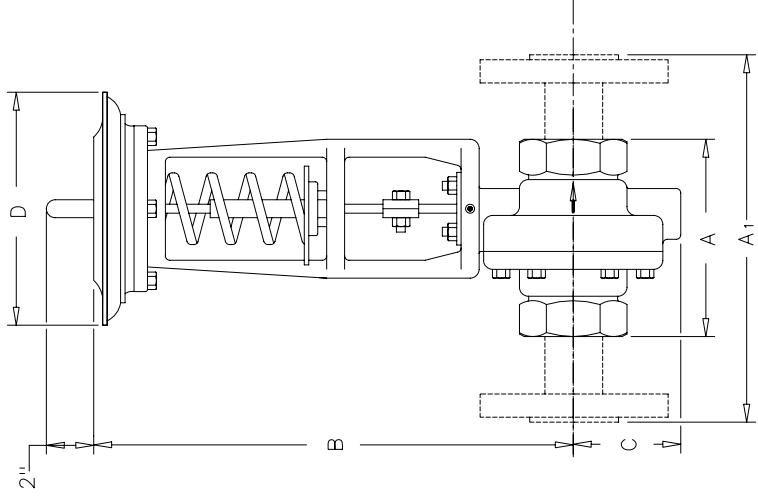

## SPECIFICATION DATA

CUSTOMER \_\_\_\_\_  
 ORDER No. \_\_\_\_\_ SERIAL No. \_\_\_\_\_  
 TAG No. \_\_\_\_\_  
 VALVE TYPE \_\_\_\_\_ QTY. \_\_\_\_\_  
 BODY \_\_\_\_\_  
 END CONN. \_\_\_\_\_  
 INLET PRESS. \_\_\_\_\_ MAX. Δ P \_\_\_\_\_  
 TEMP. RANGE \_\_\_\_\_ SET AT \_\_\_\_\_  
 VALVE ACTION: RISE IN TEMPERATURE TO  OPEN  CLOSE  
 VALVE SEAT \_\_\_\_\_ Cv \_\_\_\_\_  
 MISC. \_\_\_\_\_  
 CERTIFIED \_\_\_\_\_ DATE \_\_\_\_\_

 RICHARDS INDUSTRIES  
 CINCINNATI, OHIO  
 U.S.A.

FN: MK86 VALVE GROUP ○

1/2-2" MARK 86  
 AMBIENT TEMPERATURE REGULATOR

DATE 6/14/96  
 DRAWN BY JLA  
 CHECKED BY \_\_\_\_\_  
 MK86

+